C7-5S Geared Angle Handpiece Product Upgrade Description

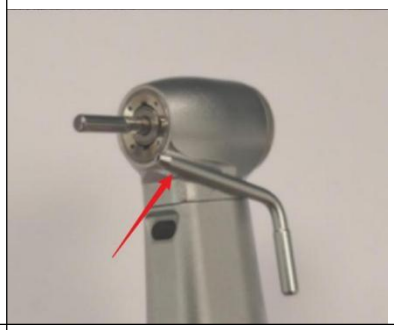
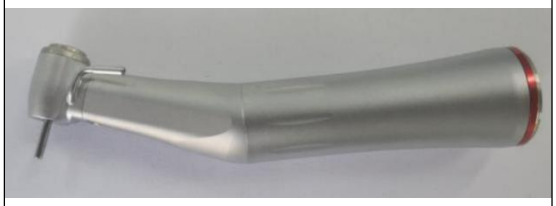
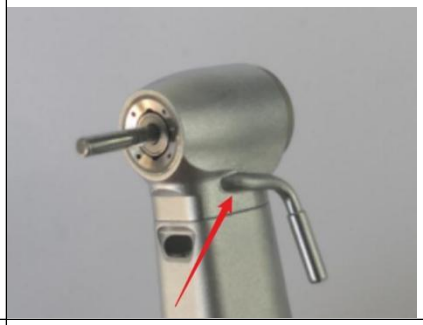
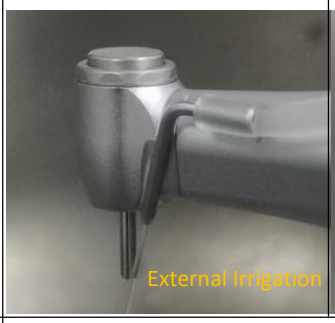
1、Overview of Product Upgrade

C7-5S has been upgraded with an internal water cooling function and features dual cooling modes (internal and external). Application instructions are as follows:

- External water cooling: Compatible with peristaltic pump devices (e.g., power systems, implant machines) and used for sterile surgeries.

- Internal water cooling: Ready for use when connected to internal water channel electric or pneumatic motors, suitable for routine tooth preparation and restoration.

2、Comparison Before and After Upgrade

Item	Upgraded C7-5S	Previous C7-5S
Appearance	 	 
Cooling Method	Internal water: 4-hole spray / External water: single-hole outlet  	External water only, no internal water 
Clinical Application	Restoration + surgical grinding	Mainly surgical grinding
Illumination	Yes	Yes
Gear Ratio	1:5	1:5
Maximum Speed	200,000rpm	200,000rpm
Head Size	Φ 10mm X H14.8mm	Φ 10mm X H14.8mm
Weight	87g	87g
Chuck Type	Push-button	Push-button
Compatible Burs	ISO Φ1.6 FG standard burs	ISO Φ1.6 FG standard burs
Shell Material	Copper alloy	Copper alloy
Available Versions	Standard Chinese Edition, Standard English Edition	Standard Chinese Edition, Standard English Edition

Prepared by：徐宝怡

Date: January 7, 2026